


ML-210 Mailbox Lock



Specifications

Model	ML-210
Control Mode	Fail secure (NO) or Fail safe (NC)
Power Input	DC-12V / 300mA or DC-24V / 150mA (In Fail secure mode, standby does not consume power)
Application	Mailbox, Cabinet, Locker, Drawer
Dimension (mm)	82 (L) x 30 (W) x 28 (H)


ML-220 Mailbox Lock

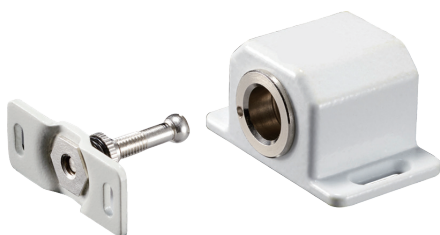

Specifications

Model	ML-220
Control Mode	Fail secure (NO)
Holding force	> 150KG
Power Input	DC-12V / 100mA
Application	Mailbox, Cabinet, Locker, Drawer
Operating Temp.	-40°C ~ 60°C
Dimension (mm)	50 (L) x 30.2 (W) x 26.8 (H)
Weight	0.18kg

ML-230 Mailbox Lock

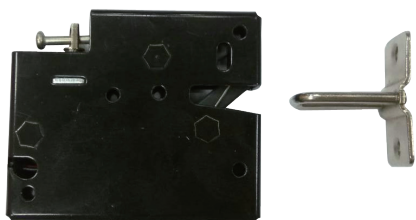

Specifications

Model	ML-230
Control Mode	Fail secure (NO)
Unlock Door Mode	While unlocking, the cabinet door automatically pops up
Power Input	DC-12V
Application	Mailbox, Cabinet, Locker, Drawer
Operating Temp.	-20°C ~ 55°C
Dimension (mm)	66 (L) x 56 (W) x 13 (H)